

**Step milling system**

# FP 723

**ap max. 12,0mm**  
**eff. 6 cutting edges**



**Jongen Werkzeugtechnik GmbH**


Siemensring 11 · D-47877 Willich  
Tel: 02154 9285 2900 · Fax: 02154 9285 9 2900  
www.jongen.de · email: info@jongen.de



## THE TOOL


The milling tool generation 723 has been especially developed for the step-, slot and face milling processing, in terms of roughing and finishing steels, high grade steels, cast iron and difficult to mill materials.

These tools are available as shell type mills, with diameter range from 40 to 160 mm, in standard and closed tooth pitch.

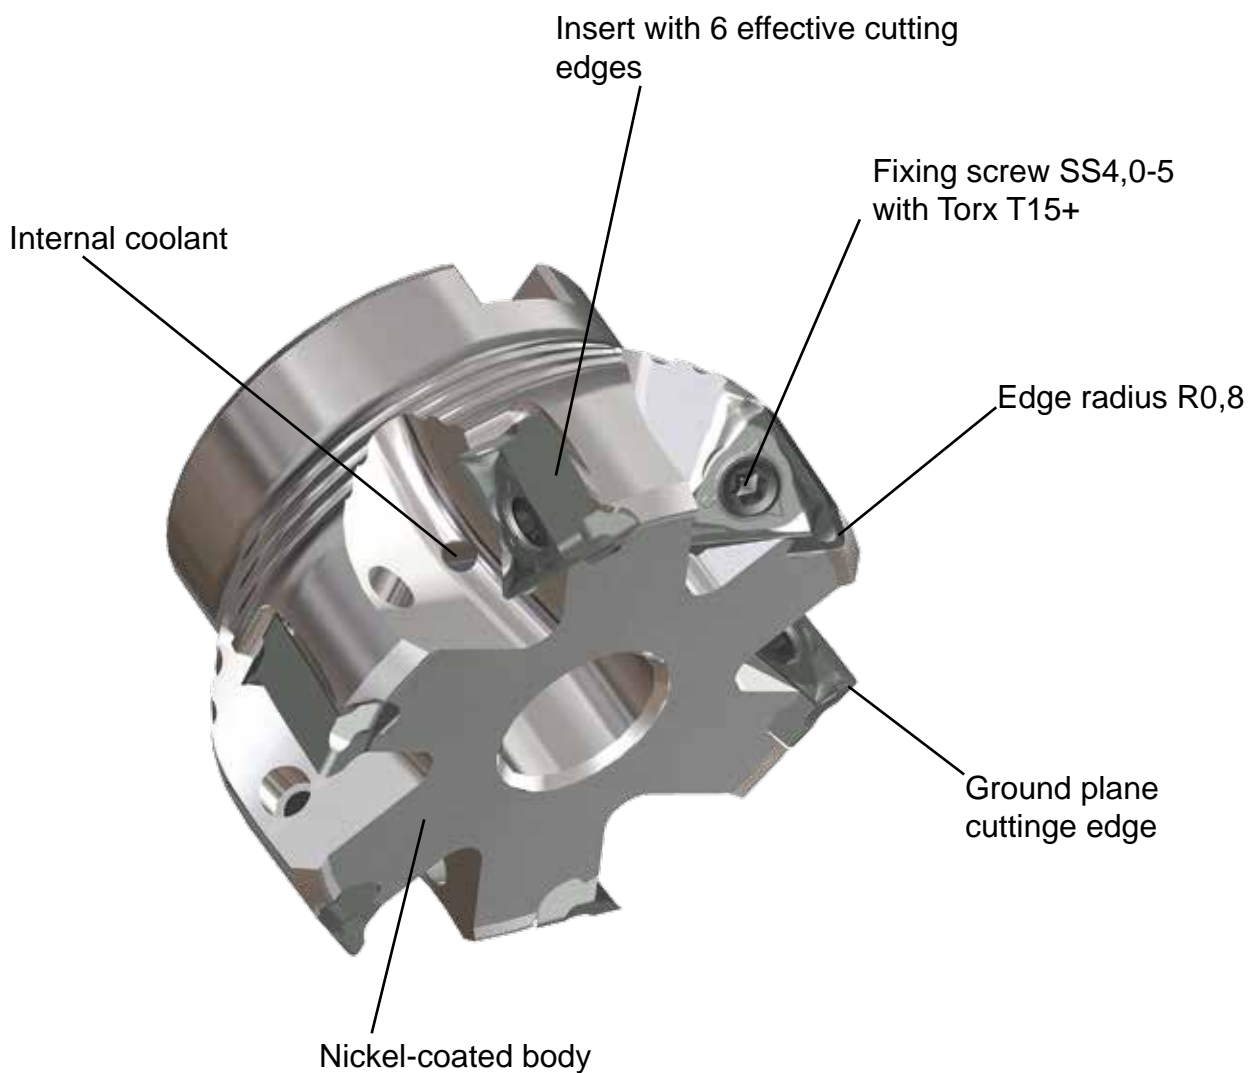

## PERFORMANCE CRITERIA

- High productivity thanks to 6 effective cutting edges
- High chip removal rate by an axial depth of cut of up to 12 mm
- High surface finish by the ground plane chamfer
- Axial depth of cut of up to 9 mm ensure almost step-free surfaces / side walls
- The optimal coordinated cutting edge with cutting materials grant high tool lives
- The tools are made of solid and additionally tempered tool steel and can therefore withstand highest charges
- Nickel-coated surfaces of the tool cause high resistance against reweldings and corrosions
- Shell type mills are made to DIN 8030-A
- All tools include internal coolant passages
- All tools are available in standard and closed tooth pitch, offering a great choice for all usual machining processes

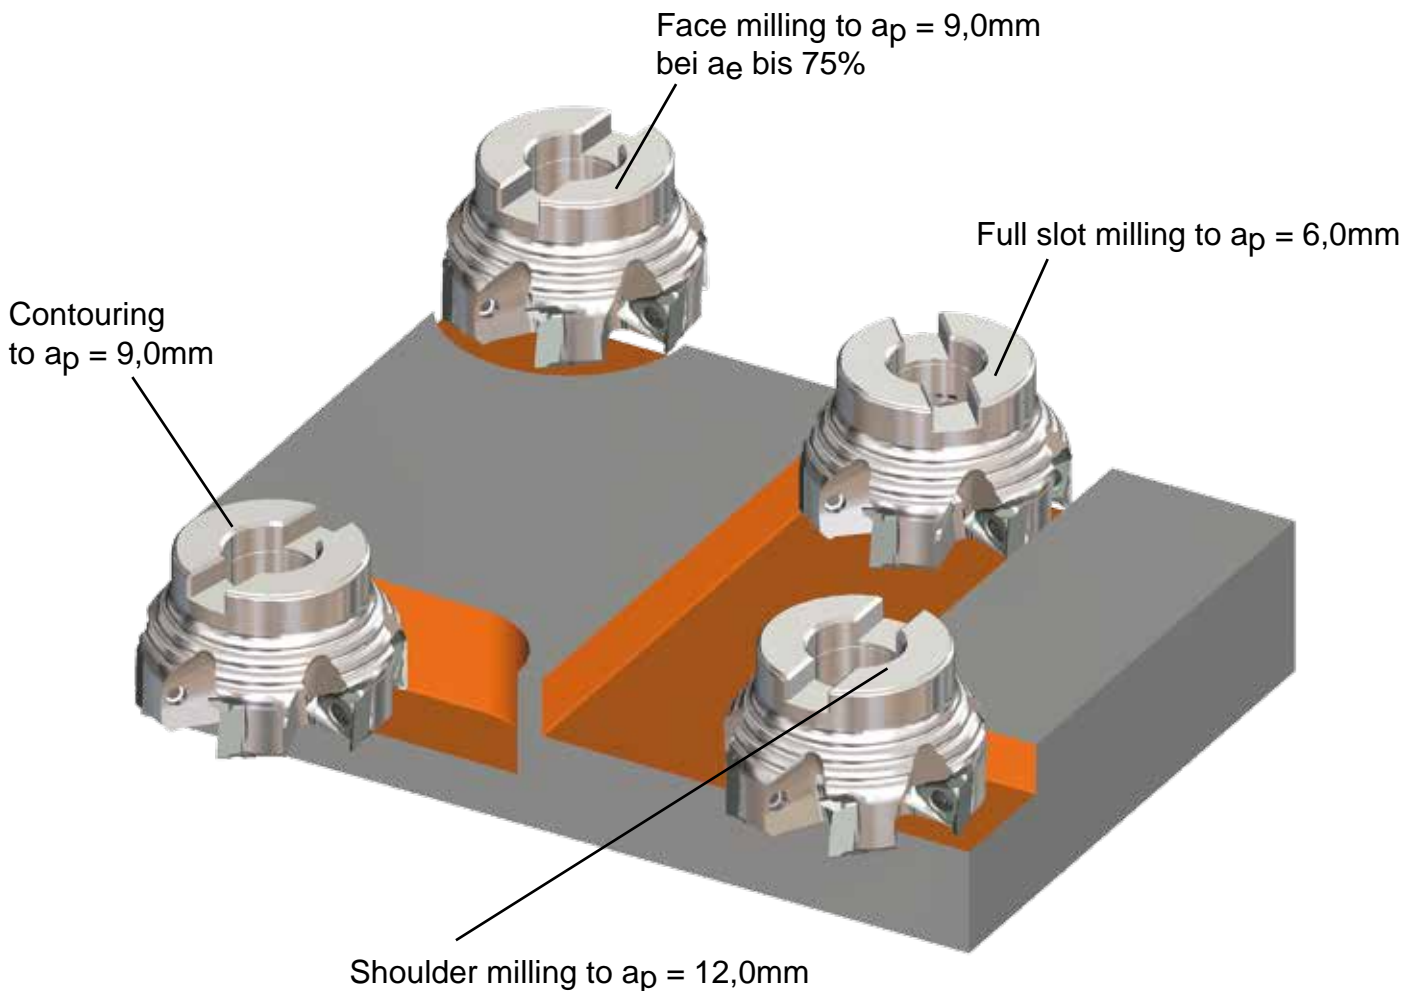

## DIE WENDEPLATTE


- Precision ground insert with chip breaker and ground plane cutting edge, chamfered and rounded cutting edge.
- Axial depth of cut max. 12,0mm
- Edge radiuses R 0,8



**FP 723**

- Application areas: all kind of steels and high-grade steels, hard-to-machine materials as well as cast iron materials.

### Inserts´ fitting

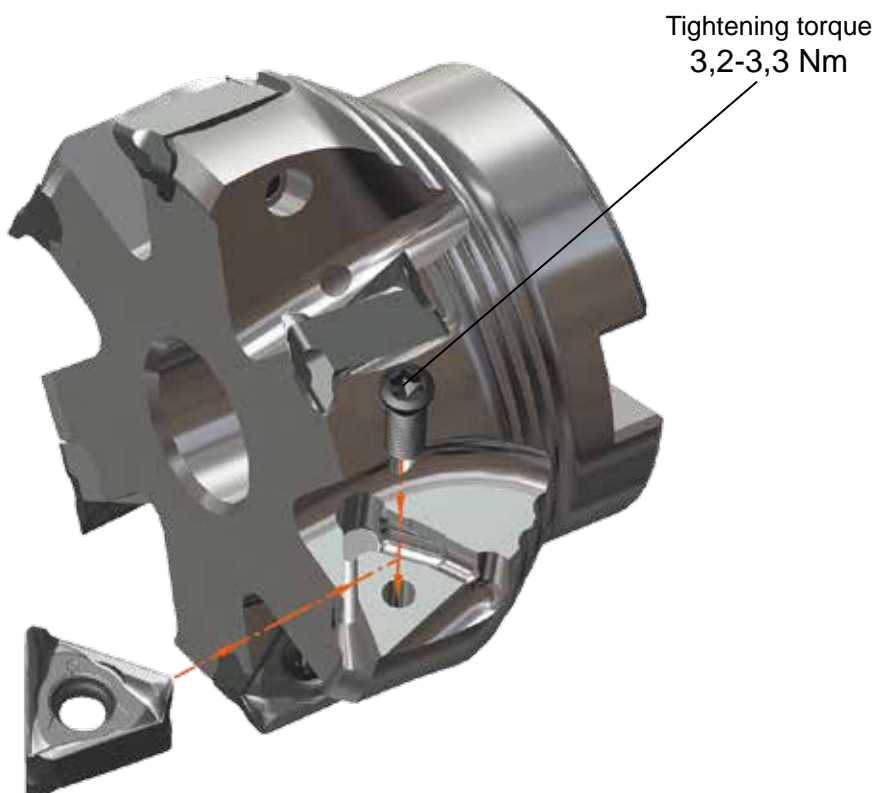

Following carbide qualities are offered:

**HC45**



**Code 41 , ISO-Classification P30-35**

Very tough fine grain quality with a thick power nitride coating for middle - high cutting speeds and high feed rates. This quality is suitable for dry milling and can also be adopted with cooling. Application areas are roughing and finishing of almost all steels such as structural steel, tool steel, heat-treatable steel as well as unalloyed, low alloyed and high alloyed steel, and also cast-qualities such as grey cast iron, globular graphite cast iron etc.

**HC30**



**Code 52 , ISO-Classification M25-M30**

Hard wearing and tough finest grain carbide with power nitride coating for middle cutting speeds and middle feed rates. This quality is suitable for dry milling and can also be adopted with cooling. Application areas are roughing and finishing high grade steel as well as high alloyed materials.

**XC35**



**Code 46 , Iso-Classification M20-M30**

Wear resistant and tough finest grain hard metal quality with power nitride coating. On the basis of the experience gained wet machining is preferably to be adopted with this quality; however the dry processing is also possible. XC35 has been especially developed for processing stainless steel, duplex steel and high-alloyed materials, but also for titanium etc. .


**HT20**



**Code 32 , ISO-Classification K15-K20**

Very hard wearing fine grain carbide with an AlTiN- Nanocomposit-coating for middle – high cutting speeds with high feed rates. This quality is suitable for dry milling and can also be adopted with cooling. Application areas are roughing and finishing of cast iron materials, e.g. grey-, tempered-, vermicular-, graphite- and globular graphite cast iron.



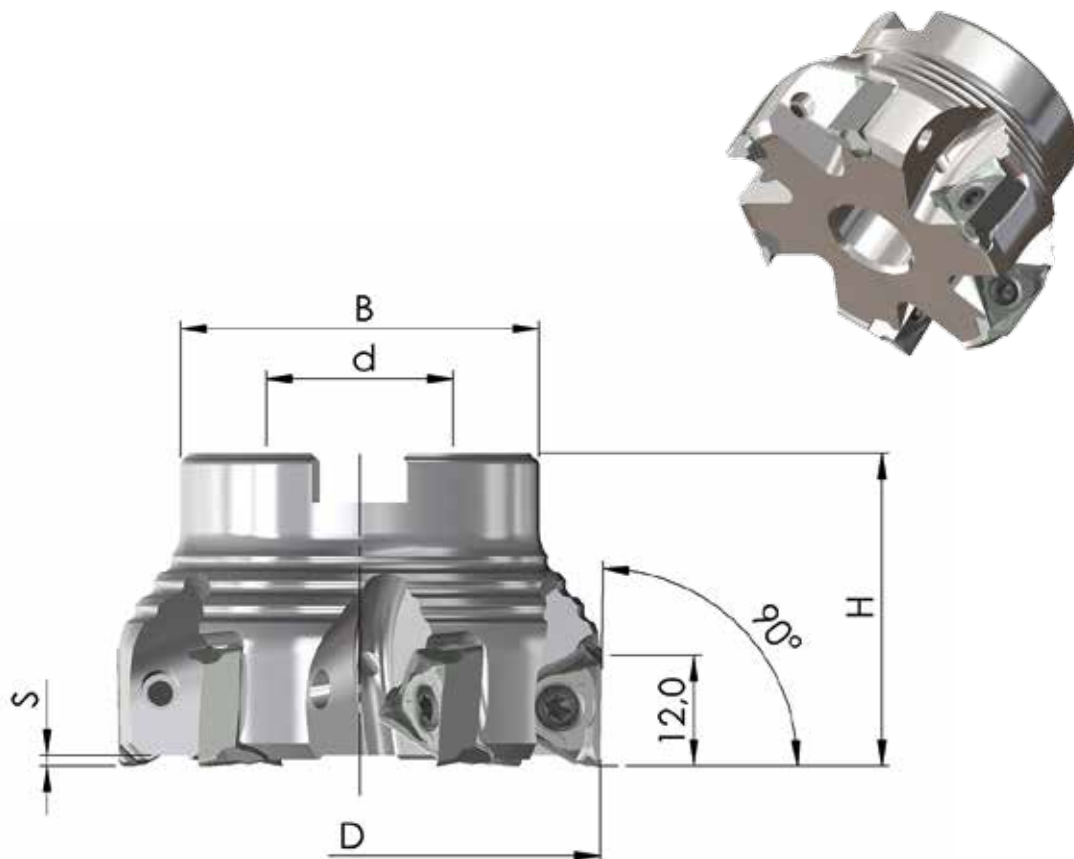



## TECHNICAL DATA






Order No.	D	H	d	B	S	Z	MS
90PP-040-723-3	40	40	16	38	1,3	3	DS 12
90PP-050-723-4	50	40	22	46	1,3	4	DS 20
90PP-063-723-5	63	40	22	46	1,3	5	MS 10x25-912
90PP-080-723-6	80	50	27	58	1,3	6	MS 12x35-912
90PP-100-723-7	100	50	32	78	1,3	7	MS 16x35-6912
90PP-125-723-9	125	50	40	90	1,3	9	MS 20x50-7991
90PP-160-723-11	160	50	40	90	1,3	11	MS 20x50-7991
<b>Close tooth pitch:</b>							
90PP-050-723-5	50	40	22	46	1,3	5	DS 20
90PP-063-723-6	63	40	22	46	1,3	6	MS 10x25-912
90PP-080-723-7	80	50	27	58	1,3	7	MS 12x35-912
90PP-100-723-9	100	50	32	78	1,3	9	MS 16x35-6912
90PP-125-723-11	125	50	40	90	1,3	11	MS 20x50-7991
90PP-160-723-13	160	50	40	90	1,3	13	MS 20x50-7991


MS= Central screw

## Inserts

		HC45 (code 41)	HC30 (code 52)	XC35 (code 46)	HT20 (code 32)		
	<b>FP 723</b> (B31) IK $\varnothing 10,8 \times 8,87$ R0,8						
	VPE	10	10	10	10		

## Spare Parts

	<b>SS 4,0-5</b>	Anzugsmoment <b>3,2-3,3 Nm</b>	<b>Fixing screw</b>
	<b>T 15+</b>	<b>Screw driver</b>	
	<b>100 g</b>	<b>Heavy duty grease</b>	

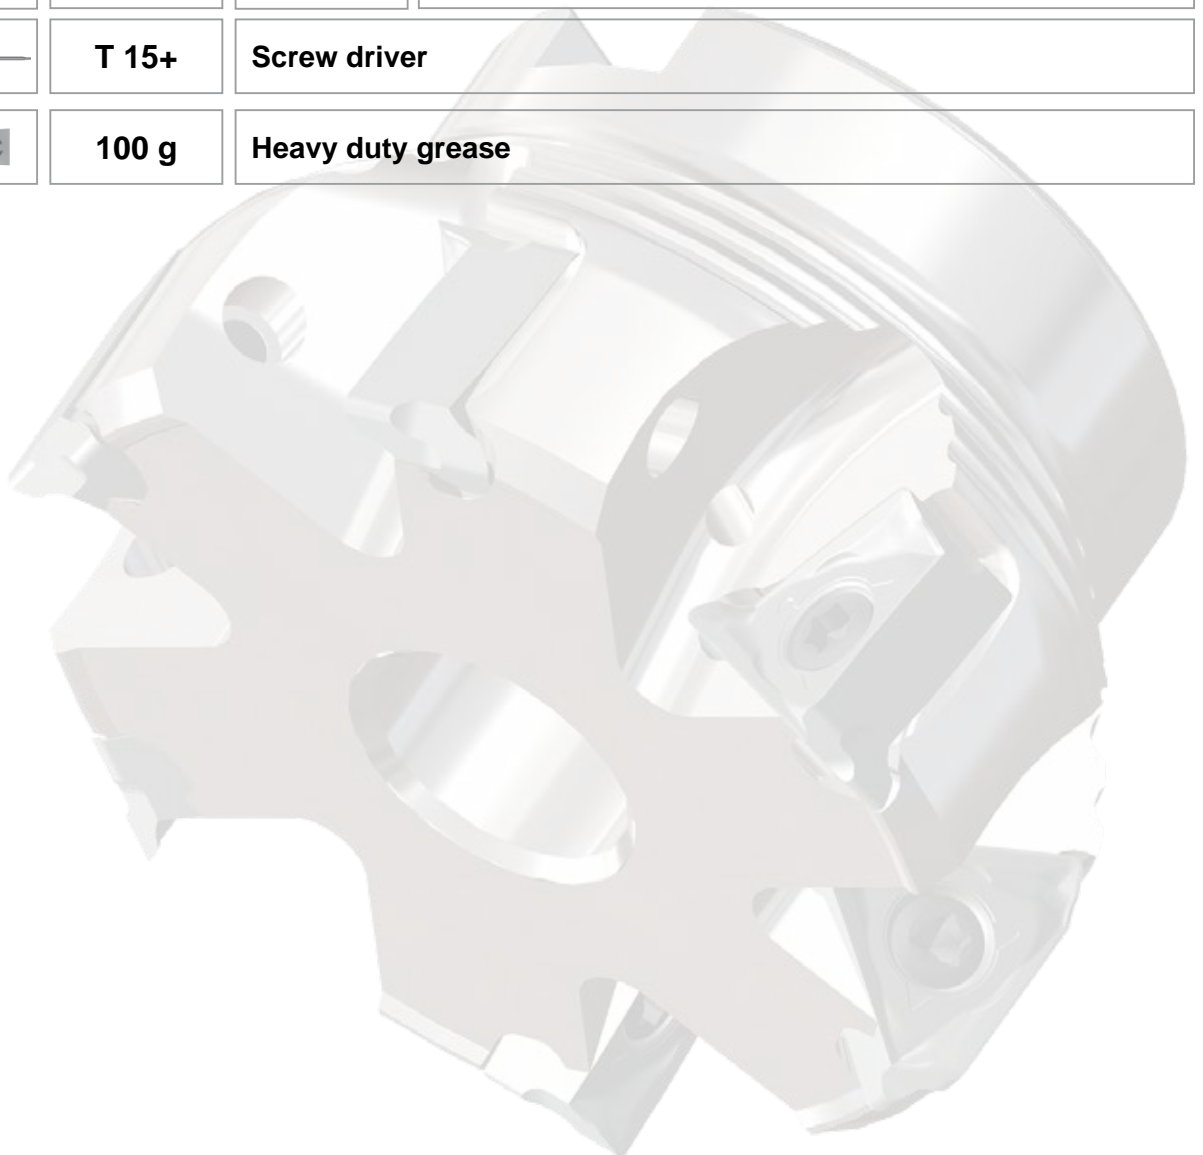

## PARAMETERS STEP MILLING

Material	Hardness	Quality	Depth of cut [mm]		V <sub>c</sub> [m/min <sub>1</sub> ]	Feed rate per tooth												
			a <sub>e</sub>	a <sub>p</sub> max.		ø40 f <sub>z</sub> [mm]	ø50 f <sub>z</sub> [mm]	ø63 f <sub>z</sub> [mm]	ø80 f <sub>z</sub> [mm]	ø100 f <sub>z</sub> [mm]	ø125 f <sub>z</sub> [mm]	ø160 f <sub>z</sub> [mm]						
P	Structural steel, Unalloyed steel	HC45 (HC30)	<180 HB	>0,75 D - 1 D	-12,0 - 9,0 - 6,0	250 (200-350)	0,22 (0,14 - 0,27)	0,25 (0,17 - 0,30)	0,31 (0,23 - 0,36)	0,33 (0,25 - 0,38)	0,22 (0,14 - 0,27)	0,25 (0,17 - 0,30)	0,31 (0,23 - 0,36)	0,33 (0,25 - 0,38)	0,22 (0,14 - 0,27)	0,25 (0,17 - 0,30)	0,31 (0,23 - 0,36)	0,33 (0,25 - 0,38)
				-0,25 D -0,50 D -0,75 D	-12,0 -12,0 - 9,0 - 6,0	220 (160-280)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,20 (0,12 - 0,25)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)
M	Tool steel, Heat-treatable steel, Alloyed steel	HC45 (HC30)	180-350 HB	>0,75 D - 1 D	-12,0 -12,0 - 9,0 - 6,0	240 (140-300)	0,27 (0,19 - 0,32)	0,25 (0,17 - 0,30)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)	0,27 (0,19 - 0,32)
				-0,25 D -0,50 D -0,75 D	-12,0 -12,0 - 9,0 - 6,0	240 (140-300)	0,20 (0,12 - 0,25)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,20 (0,12 - 0,25)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)
S	Stainless-steel, High grade steel, High alloyed steel	XC35 HC30	<270 HB	>0,75 D - 1 D	-12,0 -12,0 - 9,0 - 6,0	60 (40-200)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)	0,23 (0,15 - 0,28)
				-0,25 D -0,50 D -0,75 D	-12,0 -12,0 - 9,0 - 6,0	60 (40-200)	0,20 (0,12 - 0,25)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,20 (0,12 - 0,25)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)
K	Heat-resistant super alloys, Titan alloys	XC35	<800 N/mm <sup>2</sup>	>0,75 D - 1 D	-12,0 -12,0 - 9,0 - 6,0	250 (180-350)	0,33 (0,25 - 0,38)	0,31 (0,23 - 0,36)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)	0,33 (0,25 - 0,38)
				-0,25 D -0,50 D -0,75 D	-12,0 -12,0 - 9,0 - 6,0	250 (180-350)	0,20 (0,12 - 0,25)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,20 (0,12 - 0,25)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)
K	Grey cast iron	HT20	<800 N/mm <sup>2</sup>	>0,75 D - 1 D	-12,0 -12,0 - 9,0 - 6,0	200 (130-280)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)
				-0,25 D -0,50 D -0,75 D	-12,0 -12,0 - 9,0 - 6,0	200 (130-280)	0,20 (0,12 - 0,25)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,20 (0,12 - 0,25)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)
K	Globular graphite cast iron	HT20 (HC45)	<350 N/mm <sup>2</sup>	>0,75 D - 1 D	-12,0 -12,0 - 9,0 - 6,0	200 (130-280)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)	0,30 (0,22 - 0,35)
				-0,25 D -0,50 D -0,75 D	-12,0 -12,0 - 9,0 - 6,0	200 (130-280)	0,20 (0,12 - 0,25)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,20 (0,12 - 0,25)	0,30 (0,22 - 0,35)	0,28 (0,20 - 0,33)	0,23 (0,15 - 0,28)	0,21 (0,13 - 0,26)	0,28 (0,20 - 0,33)

The above mentioned data are standard values. Up and down corrections are admitted depending on the machine type, tool and holding fixture.



# Eckfräser 723

Step milling system, Fraises à surfaçer-dresser, Fresa del tipo



Order-No.	EUR/Piece*
90PP-040-723-3	270,00 €
90PP-050-723-4	290,00 €
90PP-063-723-5	320,00 €
90PP-080-723-6	390,00 €
90PP-100-723-7	440,00 €
90PP-125-723-9	560,00 €
90PP-160-723-11	660,00 €



Order-No.	EUR/Piece*
90PP-050-723-5	310,00 €
90PP-063-723-6	350,00 €
90PP-080-723-7	420,00 €
90PP-100-723-9	470,00 €
90PP-125-723-11	590,00 €
90PP-160-723-13	690,00 €

## Wendepplatten Tungsten carbide inserts, Plaquettes de fraisage



IK ø10,8 x 8,87 R0,8

Order-No.	EUR/Piece*
FP 723 HC45	16,90 €
FP 723 HC30	16,90 €
FP 723 HT20	16,90 €
FP 723 XC35	18,20 €


## Ersatzteile Spare parts, Pièce de rechange, Parti di ricambio



Order-No.	EUR/Piece*
SS 4,0-5	1,90 €



Order-No.	EUR/Piece*
Fett 100g	12,80



Order-No.	EUR/Piece*
T 15+	13,90 €

\* alle Preise zzgl. MwSt. - Irrtümer und Auslassungen vorbehalten!  
\* les prix s'entendent net H.T. - sous réserve d'erreurs!

\* all prices plus V.A.T. - Errors and omissions excepted!  
\* Sui prezzi indicati verrà aggiunta l'I.V.A. - Salvo errori ed omissioni!